

**PIN ASSIGNMENT:**


**USB C TYPE(P1)**

A1,B1,A12,B12  
A4,B4,A9,B9

A6  
A7

Shell


A5



Resistor 56k

**USB2.0 AM(P2)**

4 GND  
1 V+  
3 D+  
2 D-  
Shell Shield

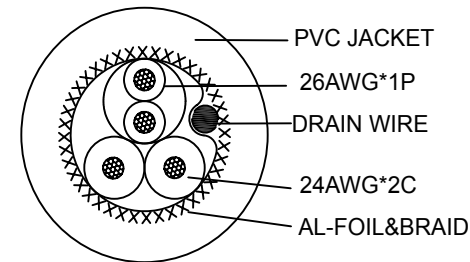

|     |                 |      |  |
|-----|-----------------|------|--|
| ⑤   | HOOD MOLD       | 1PCS | WHITE PVC (35.7*16*8.2mm)                                |
| ④   | HOOD MOLD       | 1PCS | WHITE PVC (26*12.2*6.3mm )                               |
| ③   | USB2.0 A M      | 1PCS | NICKEL PLATED SHELL                                      |
| ②   | USB3.1 TYPE C M | 1PCS | NICKEL PLATED SHELL                                      |
| ①   | CABLE           | 1PCS | (26AWG*1P)+24AWG*2C+AEB<br>OD:5.0±0.2mm WHITE PVC JACKET |
| NO. | PARTS NAME      | Q'TY | SPECIFICATION  |

**NOTES:**

- TESTING: 100% OPEN AND SHORT TEST.
- ALL MATERIAL BE RoHS COMPLIANT.

|          |         |       |           |            |
|----------|---------|-------|-----------|------------|
| APPROVED | CHECKED | DRAWN | CUSTOMER: |            |
|          |         |       | ITEM NO.  | USBC-1009M |
|          |         |       | REV.      | 01         |
|          |         |       | UNIT      | mm         |
|          |         |       | SCALE     | NONE       |

**DESCRIPTION:**

USB 3.1 TYPE C MALE/  
USB 2.0 A MALE

